

# **ReDat** Recording

## **ReDat eXperience** **Release notes v 2.39.2**



ReDat Recording, a.s.  
Pražská 147, 530 02 Pardubice  
Czech Republic

[redatrecording.com](http://redatrecording.com)

Issued: 11/2025 v 2.39.2 rev. 1

Producer:        ReDat Recording, a.s.  
                      Pražská 147  
                      530 02 Pardubice  
                      Czech Republic  
  
                      with a certified system of quality control by ISO 9001.

# Content

---

<b>1. TECHNICAL SPECIFICATIONS.....</b>	<b>4</b>
1.1 HARDWARE.....	4
1.2 SOFTWARE .....	4
1.2.1 PC with ReDat eXperience .....	4
1.2.2 User computer requirements.....	4
1.2.3 Web browsers .....	4
1.3 LIMITATIONS FOR SPEECH-TO-TEXT TOOLS .....	5
<b>2. NEW MODIFICATIONS.....</b>	<b>6</b>
2.1 SYSTEM/CHANNELS – TELEPHONY RECORDER .....	6
2.2 END OF SUPPORT FOR CUCM 12.5.....	6
<b>3. KNOWN INCOMPATIBILITIES.....</b>	<b>7</b>
3.1 TOUCHSCREEN DEVICES .....	7

# Version 2.39.2 – Nov 3, 2025

## Released for OS Windows, OS Linux

## 1. Technical specifications

---

### 1.1 Hardware

In the technical specifications, the minimum requirements for the HW PC where the eXperience system is installed have been modified and increased:

- Processor **min. 2.4 GHz, 4 cores** (depending on the configuration of the eXperience)
- RAM **16 GB** (plus 1 GB RAM for every million records in a DB)

### 1.2 Software

#### 1.2.1 PC with ReDat eXperience

- Windows Server 2016, Windows Server 2019, Windows Server 2022 (for Windows Server 2022, use Alcatel-Lucent TSAPI Premium Server version 7.5.0).
- Before the official end of support by Microsoft, ReDat Recording may discontinue support for the Windows OS version. The reason may be that the components of the current version (with security requirements) used in the ReDat eXperience software can no longer be installed on the given Windows OS version.
- It is also possible to install eXperience on virtual servers. Virtualization platforms with the operation system according to the technical conditions are supported.

#### 1.2.2 User computer requirements

User computer requirements for connection to ReDat eXperience and installation on the user computer

- **Windows OS:** Microsoft-supported operating systems.
- Some limitations for Linux OS (Mac OS) versions
- For the **ReDat Inspector** application that is installed on the user PC, the same conditions as for eXperience must be guaranteed, see chapter hardware.

#### 1.2.3 Web browsers

This eXperience version has been released for the following browser versions:

- Google Chrome: 139.0
- Microsoft Edge: 139.0
- Firefox ESR 140.2.0
- Mozilla Firefox: 142.0

The web browser versions listed are current at the time of publication of this documentation. For optimal performance and security, we recommend that you update your web browsers to the latest versions.

More information in the manual RD 044 001 Technical specifications.

## 1.3 Limitations for Speech-to-text tools

The following technical requirements for STT tools have been added to the documentation RD 044 001 ReDat eXperience – Technical specifications:

**Speech-to-text transcription tools (STTs) use their own methods of license validation.**

In principle, there are three basic authentication methods, the fingerprint of the server hardware used to run the STT tool, the USB token, and the license server.

- **Hardware fingerprint** - the CPU, HDD, ETH, plus selected OS parameters are written into the license. OS updates will not affect the OS parameters used.

**If there is any HW change or OS version upgrade, the license becomes invalid! For any manipulation with the servers, contact ReDat Recording, a.s. technical support.**


- **USB token** - HW key containing the license, **permanent connection of the USB key to the STT tool is required.**
- **License sever** - PC with Linux OS that is permanently accessible from the server with STT tools and periodically validates licenses. The manufacturer requests that the server not be changed and that the network connectivity remain.

**For any manipulation with the servers, contact ReDat Recording, a.s. technical support.**

## 2. New modifications

### 2.1 System/Channels – Telephony Recorder

The **Extension** parameter has been added to the Recording sources/Channels card in the General tab for APCM and UDR/UDRM/UDRE. The Telephony Recorder did not support this parameter until this version.

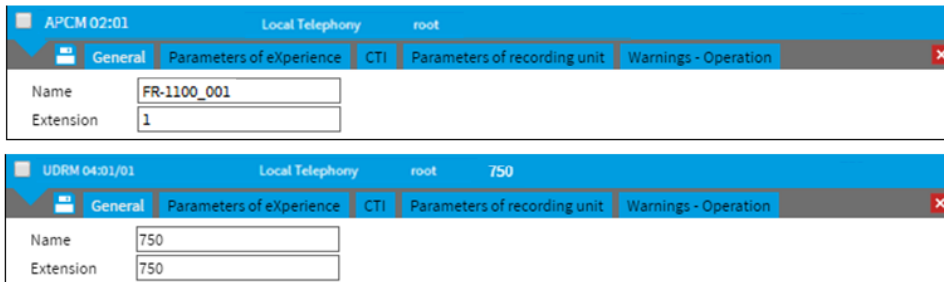


The screenshots show the 'General' tab configuration for two recording sources:

- APCM 02:01**: Name is 'FR-1100\_001', Extension is '1'.
- UDRM 04:01/01**: Name is '750', Extension is '750'.

### 2.2 End of support for CUCM 12.5

ReDat eXperience does not support CUCM version 12.5; official Cisco support ended on August 31, 2025.

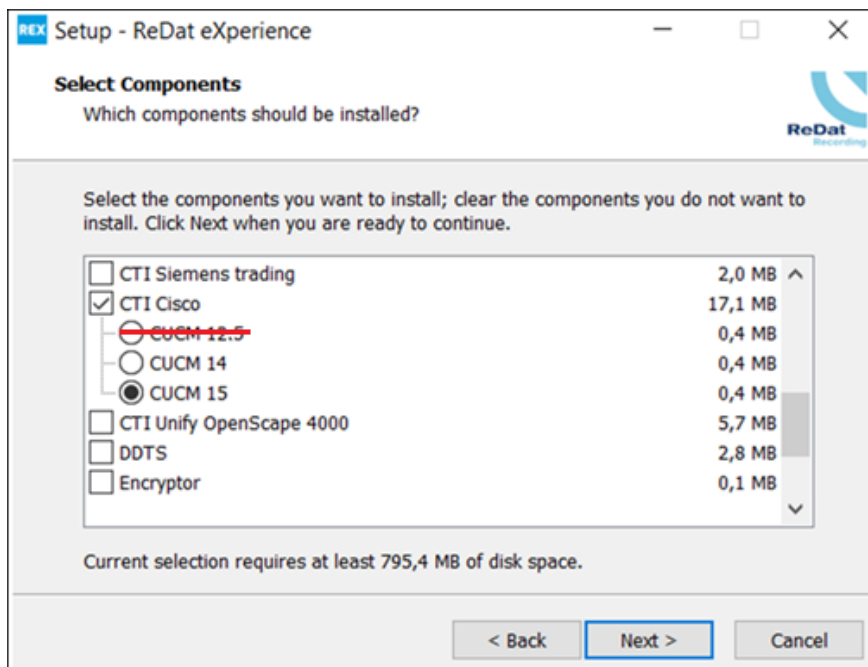

The 'Setup - ReDat eXperience' window displays the 'Select Components' section with the question 'Which components should be installed?'. It lists several components with checkboxes and their sizes:

Component	Size
<input type="checkbox"/> CTI Siemens trading	2,0 MB
<input checked="" type="checkbox"/> CTI Cisco	17,1 MB
<input checked="" type="radio"/> <del>CUCM 12.5</del>	0,4 MB
<input type="radio"/> CUCM 14	0,4 MB
<input checked="" type="radio"/> CUCM 15	0,4 MB
<input type="checkbox"/> CTI Unify OpenScape 4000	5,7 MB
<input type="checkbox"/> DOTS	2,8 MB
<input type="checkbox"/> Encryptor	0,1 MB


Current selection requires at least 795,4 MB of disk space.

Navigation buttons: < Back, Next >, Cancel.

### 3. Known incompatibilities

- Audio live monitoring in Google Chrome, Microsoft Edge, Firefox web browsers:
  - Start listening is delayed for about 3 seconds.
  - Online delay of about 3 seconds.
- Older versions of Firefox, from version 68 ESR (resp. 66 standard edition), had non-functional audio control of the channels in the player. From the version 78.8.0 ESR, this problem no longer occurs.
- The frequency of the video updates during playback of screen records can depend on several synchronously replayed channels.
- Firefox incompatibility and possible solution:
  - If a page contains too many elements (especially many short records), horizontal scrolling may hide some parts of the page, such as
    - 1 – Toolbox with icons
    - 2 – Time and range settings
    - 3 – Page area
    - 4 – Number of rows and number of selected rows
    - 5 – Left panel (the error appears after changing the width of the left panel, when some parts of the page are already hidden)
  - If this situation occurs:
    - It is possible to click on the location of the hidden items to restore their display. This is probably only a temporary fix - it will be restored the next time you scroll.
    - It is recommended that you select a shorter time or limit the number of rows displayed to 20, which will sufficiently reduce the number of items on the page.

#### 3.1 Touchscreen devices

- You cannot use the right button to access the context menu.
- Non-functional dragging (grab with mouse button pressed on PC), for example, for the following functions:
  - from the tree,
  - scroll the advanced player window,
  - drag volume and playback speed in the Advanced Player (but can be controlled by clicking).
- Non-functional help via icon .
- Some forms display buttons with an overlay below the form window.



Take-back, processing, utilization and disposal of discarded electrical equipment is ensured through the collective systems ASEKOL (electrical equipment) and ECOBAT (batteries/accumulators). Hand over used products to collection yards or to the last retailer. More information at [www.redatrecording.com](http://www.redatrecording.com), [asekol.cz](http://asekol.cz), [www.ecobat.cz](http://www.ecobat.cz). The take-back and use of packaging waste is ensured based on a take-back contract concluded with the company EKO-KOM, as. (Client number EK-F06022669).